


Pinout ESP32-CAM by Doc Cool (cool-web.de)

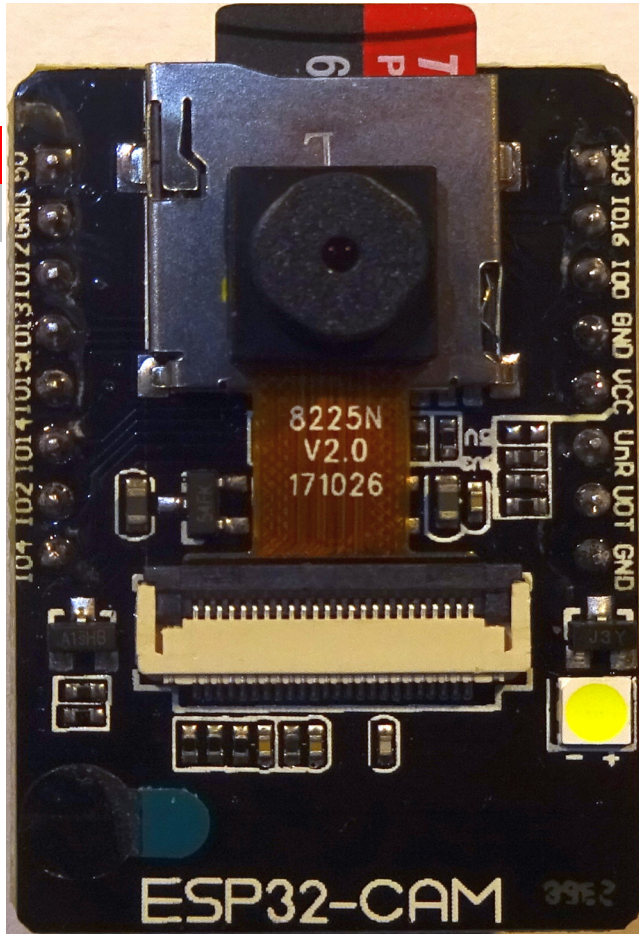

5 V		3.3 V	
GND		IO 16	
Data 2	IO 12	IO 0	Prog.
Data 3	IO 13	GND	
CMD	IO 15	VCC	
CLK	IO 14	IO 3	RX
Data 0	IO 2	IO 1	TX
Data 1	IO 4	GND	
		IO 4	Blitz LED

µSD-Leitungen

Zum Flashen Prog. mit GND verbinden